(54) Title: IMPROVING HIERARCHICAL 8PSK PERFORMANCE
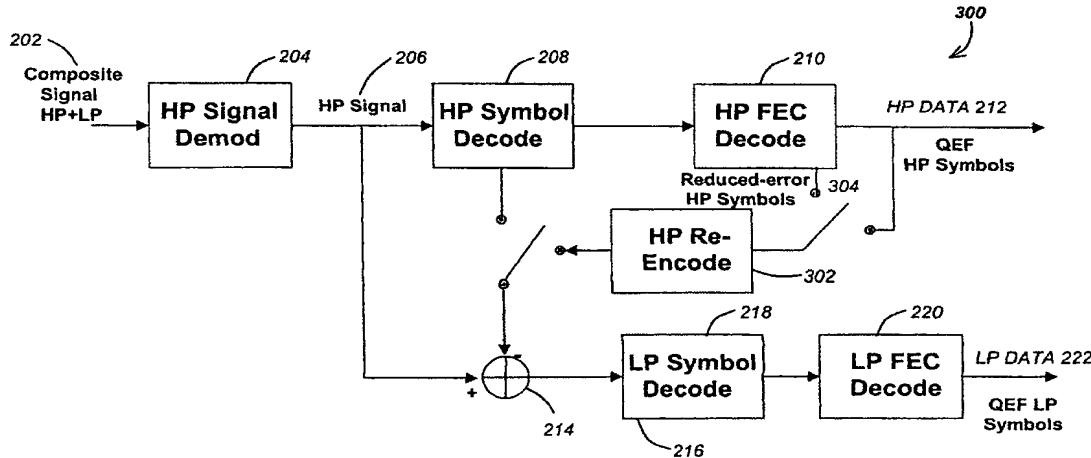
(57) Abstract: A method and receiver systems for demodulating and decoding a hierarchically modulated signal, e.g. an 8PSK signal, are disclosed. An exemplary method includes demodulating and processing (502) the hierarchically modulated signal (202) to produce symbols (212) from the first modulation at the first hierarchical level, applying information (504) from a plurality of the symbols from the first modulation at the first hierarchical level in subtracting (214) from the demodulated hierarchically modulated signal to obtain the second modulation at the second hierarchical level and processing (506) the second modulation at the second hierarchical level to produce second symbols (222) from the demodulated second signal. The hierarchically modulated signal comprises a non-uniform 8PSK signal. Applying the information from the plurality of the symbols from the first modulation can be achieved by applying the symbols after error correction. A decision-directed demodulation of the first modulation can also be used to further improve performance.